


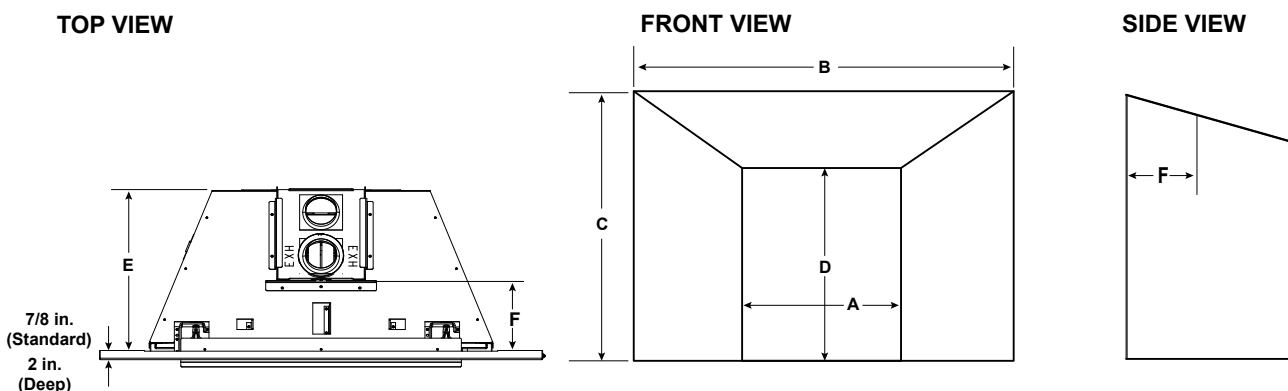

MINIMUM FIREBOX OPENING							
Location		25 inch		30 inch		35 inch	
		Inches	Millimeters	Inches	Millimeters	Inches	Millimeters
A	Opening Width - Rear	15-1/8	384	20-1/8	511	25-1/8	638
B	Opening Width - Front	26-5/8	676	31-5/8	803	36-5/8	930
C	Opening Height - Front	17-5/16	439	21	533	24-1/4	616
D	Opening Height - Rear	15-1/4	387	19-3/16	487	21-11/16	551
E*	Unit Opening Depth	15	381	15	381	15	381
F	Venting Depth - Front	7-5/8	194	7-5/8	194	7-5/8	194

Note: Dimensions assume 1/4 inch clearance on all sides.
Note: If exhaust collar on insert and fireplace damper do not line up, add 4 inches (102 mm) to minimum fireplace height for bends in vent pipe.

2 INCH DEEP SURROUND MINIMUM FIREBOX OPENING							
Location		25 inch		30 inch		35 inch	
		Inches	Millimeters	Inches	Millimeters	Inches	Millimeters
B	Alternate Opening Width - Front	26	660	31	787	36	914
C	Alternate Opening Height - Front	17-5/16	440	21	533	24-1/4	616
E	Alternate Unit Opening Depth	14	356	14	356	14	356

Note: 2 inch deep surrounds, in medium size black finish have been created as standard accessory.
Sku Names: MI30-4230D-BK, MI35-4432D-BK

*Unit depth is measured to the back of the surround to give the depth needed for installation.

In addition to these dimensions, also reference Section 3.D and 3.E..

Figure 3.8 Firebox Opening - Standard Surround - 3/4 in.

→ Custom Surrounds

Custom surrounds are available. See your dealer for information. Standard surrounds are 7/8 inches deep. Custom surrounds are available up to 3 inches deep. A 3 inch deep surround would reduce the unit opening depth (**E***) by 2-1/8 inches (3 in. - 7/8 in. = 2-1/8 in).

On Site Custom Surrounds

On site custom surrounds are available. See your dealer for information. On site custom surrounds are flush and have no depth. A flush surround would increase the unit opening depth (**E***) by 7/8 inch.